

C A M B R I D G E


MODEL SS660-PT SERIES STAINLESS STEEL LOW PROFILE "POLY-TOP" FLOOR SCALES

Applications:

- Pharmaceutical
- Food Processing
- Batching/Filling
- Harsh Environment
- Washdown Environment
- General Purpose Weighing



Model SS660-PT-OB features an ON-BOARD junction box

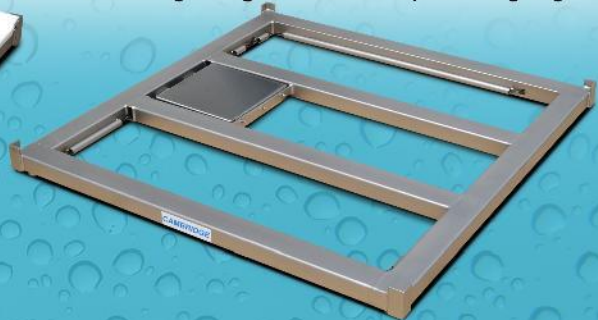

Model SS660-PT-R features a REMOTE junction box



Optional Cambridge
Model SSCSW-10AT
indicator.

Model SS660-PT-OB Features:

- "ON-BOARD" stainless steel NEMA IV, water seal rated junction box
- 1" thick USDA/FDA approved removeable polyethylene top
- Hand slots to remove "Poly-Top" for cleaning
- Stainless steel Type 304 construction
- Capped and sealed stainless steel structural tubing
- Stainless steel IP67 waterseal rated load cells
- 20 ft. shielded signal cable
- 100% end loading protection
- 200% overload & shock load protection
- Easy access leveling

Model SS660-PT-R Features:

All of the above except with-

- "REMOTE" stainless steel NEMA IV, water seal rated junction box and 10' Sealite flex conduit



Model SS660-PT-R shown with optional
stainless steel free standing indicator column
and Cambridge Model SSCSW-10AT indicator.

Approvals:



COC# 96-157A1



SONICH INDUSTRIAL SALES CO., INC.
CLEVELAND, OHIO
(440) 546-1170 Fax (440) 546-9141
www.sonichindustrial.com
Email: sales@sonichindustrial.com

Members:

- THE NATIONAL CONFERENCE ON WEIGHTS AND MEASURES

C A M B R I D G E

MODEL SS660-PT SERIES STAINLESS STEEL LOW PROFILE "POLY-TOP" FLOOR SCALES

Model SS660-PT Specifications (Standard Sizes)

SIZE	CAPACITY	SHIP WEIGHT	POLY-TOP WEIGHT	SIZE	CAPACITY	SHIP WEIGHT	POLY-TOP WEIGHT
24" x 24" x 3.75"	1,000 lb.	85 lb.	20 lb.	48" x 60" x 3.75"	5,000 lb. *	335 lb.	100 lb.
	2,500 lb.	85 lb.	20 lb.		10,000 lb. *	430 lb.	100 lb.
30" x 30" x 3.75"	1,000 lb.	110 lb.	32 lb.	48" x 72" x 3.75"	5,000 lb. *	405 lb.	120 lb.
	2,500 lb.	110 lb.	32 lb.		10,000 lb. *	510 lb.	120 lb.
36" x 36" x 3.75"	1,000 lb.	160 lb.	45 lb.	60" x 60" x 3.75"	5,000 lb. *	425 lb.	125 lb.
	2,500 lb.	160 lb.	45 lb.		10,000 lb. *	530 lb.	125 lb.
	5,000 lb.	160 lb.	45 lb.				
48" x 48" x 3.75"	1,000 lb.	210 lb.	80 lb.	60" x 60" x 4.75"	20,000 lb. *	785 lb.	125 lb.
	2,500 lb.	210 lb.	80 lb.	60" x 84" x 4.75"	10,000 lb. *	1,050 lb.	175 lb.
	5,000 lb. *	210 lb.	80 lb.		20,000 lb. *	1,275 lb.	175 lb.
	10,000 lb. *	335 lb.	80 lb.				

* NTEP Approved
Custom sizes available. Consult factory

Model SS660-PT Stainless Steel Options:



Type 316 construction



Hermetically sealed
and/or "FM" approved load cells



Captive ball
leveling feet



Model SSCSW-10AT




Model SSCSW-20AT

Model SS660-PT Stainless Steel Accessories:



Ramp



Pit form



Bumper guard



Bumper guard surround




48" Indicator column
(Free standing)



Lag down bracket
(sold individually)



Portability cart

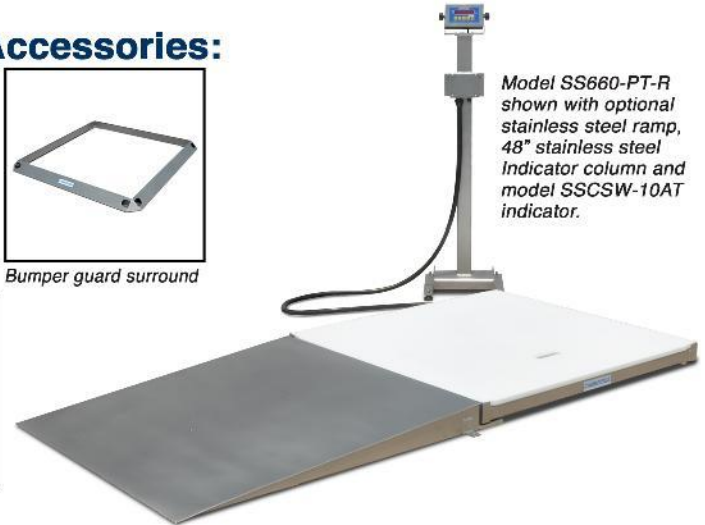

Model SS660-PT-R
shown with optional
stainless steel ramp,
48" stainless steel
indicator column and
model SSCSW-10AT
indicator.

SONICH INDUSTRIAL SALES CO., INC.

CLEVELAND, OHIO

(440) 546-1170 Fax (440) 546-9141

www.sonichindustrial.com

Email: sales@sonichindustrial.com

Cambridge Scale Works, Inc.
will warrant this product for
one full year against defects
in material and/or workmanship